

VFD Customer Display


WD-2030

Number of columns : 20 columns x 2 line

Interface : RS232C and USB



POS/ECR

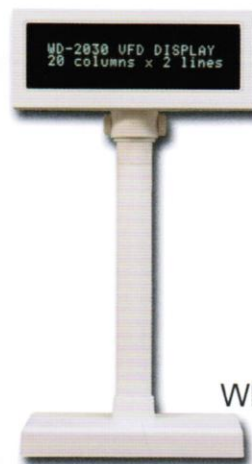

White



Black

Others



Power



USB

RS-232



Round Base

Specification

Model	✓	WD-2030
Display method	✓	VFD display (blue green)
Number of columns		20 columns x 2 line
Brightness		700 cd/m ²
Character type		5 x 7 dot matrix
Character size	✓	9.0 x 5.25 mm
Fonts		96 alphanumeric
		13 international
		1 user define
		11 code page
Command and driver	✓	ESC/POS and OPOS
MTBF (power on time)		25000 hours
Viewing angle		0 ~ 45 degree
Rotating angle		270 degree (Max.)
Power supply		9 ~ 40 VDC
Power consumption		6W (Max.)
Interface	✓	RS-232C and USB
Gross weight		1.7 kg
External dimension	Long	225 (W) x 100 (D) x 560 (H) mm
	Middle	225 (W) x 100 (D) x 285 (H) mm
	Short	225 (W) x 100 (D) x 195 (H) mm
Temperature	Operating	0 ~ 45°C
	Storage	-10 ~ 50°C
Humidity	Operating	10 ~ 90 %RH
	Storage	10 ~ 90 %RH